

Nonresonant entrainment of detuned oscillators induced by common external noise

¹Kazuyuki Yoshimura, ¹Peter Davis, and ²Atsushi Uchida

¹*NTT Communication Science Laboratories, NTT Corporation
2-4, Hikaridai, Seika-cho, Soraku-gun, Kyoto 619-0237, Japan*

²*Department of Electronics and Computer Systems, Takushoku University
815-1 Tatemachi, Hachioji, Tokyo 193-0985, Japan*

(Dated: February 1, 2008)

We have found that a novel type of entrainment occurs in two nonidentical limit cycle oscillators subjected to a common external white Gaussian noise. This entrainment is anomalous in the sense that the two oscillators have different mean frequencies, where the difference is constant as the noise intensity increases, but their phases come to be locked for almost all the time. We present a theory and numerical evidence for this phenomenon.

PACS numbers: 05.45.-a, 05.45.Xt

Entrainment is a key mechanism for the emergence of order and coherence in a variety of physical systems consisting of oscillatory elements. It is one of the fundamental themes of nonlinear physics to explore the possible types of entrainments and clarify their fundamental properties. One of the typical entrainment phenomena is that caused by an external periodic signal. Consider two independent limit cycle oscillators of slightly different natural frequencies ω_i , $i = 1, 2$. Suppose that these two oscillators are in resonance with the external periodic signal, i.e., $m\omega_i - n\Omega \simeq 0$, where m and n are integers and Ω is the external signal frequency. In this case, it is possible that the two oscillators have the same mean frequency $n\Omega/m$. This type of entrainment can be observed in various systems as diverse as periodically driven electrical circuits, lasers with coherent optical injections, and biological circadian rhythms. Resonant entrainment can be described by using simple dynamical models for phase variables and the essential properties are well understood (e.g., [1]).

Recent physical and numerical experiments have shown that not only a periodic but also a noise-like signal can give rise to entrainment between two independent oscillators [2, 3, 4, 5, 6]. The concept of entrainment of limit cycle oscillators induced by common signals has to be generalized to include the case of noise-like signals. The entrainment by a noise-like signal is a nonresonant one in the sense that there is no resonance relation between the oscillator and the noise. Entrainment between two independent and *identical* oscillators induced by a common noise signal has already been studied [5]: it has been analytically shown for a wide class of limit cycle oscillators that the phase locking state becomes linearly stable by applying an arbitrary weak Gaussian noise.

However, in real systems, the two oscillators are never identical but slightly detuned. We note that the theory in Ref. [5] does not guarantee the entrainment between nonidentical oscillators at all. As an illustrative example, consider two pairs of oscillators, where one pair has a natural frequency ω_1 and the other pair has a different natural frequency ω_2 , and suppose that they are subjected to a weak common noise. The theory tells that

the phase locking occurs in each pair. However, it does not occur between the two pairs because for a weak noise the mean frequencies of the pair with ω_1 and that with ω_2 are still close to ω_1 and ω_2 , respectively. One might expect that the nonidentical oscillators come to have the same mean frequency and stable phase locking occurs when large enough noise is applied. As we will show, this is not the case. It has not yet been clarified at all what kind of phenomenon happens between nonidentical oscillators. It is necessary to clarify this point for better understanding of real systems.

In this study, we consider a general class of limit cycle oscillators and reveal that a novel type of entrainment occurs between two nonidentical oscillators subjected to a common white Gaussian noise, which we call the *nonresonant entrainment*. This entrainment is anomalous in the sense that the two oscillators have different mean frequencies and the difference is constant even if the noise intensity increases but their phases come to be locked for almost all the time.

Let $\mathbf{X}_i \in \mathbf{R}^N$ be a state variable vector and consider the equation

$$\dot{\mathbf{X}}_i = \mathbf{F}(\mathbf{X}_i) + \delta \mathbf{F}_i(\mathbf{X}_i) + \mathbf{G}(\mathbf{X}_i)\eta(t), \quad i = 1, 2, \quad (1)$$

where $\mathbf{F}$ is an unperturbed vector field, $\delta \mathbf{F}_1$ and $\delta \mathbf{F}_2$ are small deviations from it, $\mathbf{G} \in \mathbf{R}^N$ is a vector function, and $\eta(t)$ is the white Gaussian noise such that $\langle \eta(t) \rangle = 0$ and $\langle \eta(t)\eta(s) \rangle = 2D\delta(t-s)$, where $\langle \cdots \rangle$ denotes averaging over the realizations of η and δ is Dirac's delta function. We call the constant $D > 0$ the noise intensity. The noise-free unperturbed system $\dot{\mathbf{X}} = \mathbf{F}(\mathbf{X})$ is assumed to have a limit cycle with a frequency ω . We employ the Stratonovich interpretation for the stochastic differential equation (1). This interpretation allows us to apply the phase reduction method to Eq. (1), which assumes the conventional variable transformations in differential equations.

If we regard the common noise as a weak perturbation to the deterministic oscillators and apply the phase reduction method to Eq. (1), we obtain the equation for the phase variable as follows:

$$\dot{\phi}_i = \omega + \delta\omega_i(\phi_i) + Z(\phi_i)\eta(t), \quad i = 1, 2, \quad (2)$$

where ω is the frequency of the unperturbed oscillator, $\delta\omega_i$ is the frequency variation due to $\delta\mathbf{F}_i$, Z is defined by $Z(\phi) = \mathbf{G}(\mathbf{X}_0(\phi)) \cdot (\text{grad}_{\mathbf{x}} \phi|_{\mathbf{x}=\mathbf{x}_0(\phi)})$, where ϕ is the phase variable defined by the unperturbed system $\dot{\mathbf{X}} = \mathbf{F}(\mathbf{X})$ and $\mathbf{X}_0(\phi)$ is its limit cycle solution. By definition, $Z(\phi)$ is a periodic function, i.e., $Z(\phi) = Z(\phi + 2\pi)$. We assume that Z is three times continuously differentiable and not a constant. It is also assumed that $0 < D/\omega \ll 1$ to ensure the validity of the phase reduction.

In order to derive the average equation for ϕ_i , we translate Eq. (2) into the equivalent Ito stochastic differential equation:

$$\dot{\phi}_i = \omega + \delta\omega_i(\phi_i) + DZ(\phi_i)Z'(\phi_i) + Z(\phi_i)\eta(t), \quad (3)$$

where the dash denotes differentiation with respect to ϕ_i . In the Ito equation, unlike in Stratonovich formulation, the correlation between ϕ_i and η vanishes. If we subtract Eq. (3) for ϕ_2 from that for ϕ_1 and take the ensemble average, then we have the average equation

$$\begin{aligned} \frac{d}{dt}\langle\phi_1 - \phi_2\rangle &= \langle\delta\omega_1(\phi_1)\rangle - \langle\delta\omega_2(\phi_2)\rangle \\ &+ D\{\langle Z(\phi_1)Z'(\phi_1)\rangle - \langle Z(\phi_2)Z'(\phi_2)\rangle\}, \end{aligned} \quad (4)$$

where we used the fact $\langle Z(\phi_i)\eta(t)\rangle = \langle Z(\phi_i)\rangle\langle\eta(t)\rangle = 0$. Each ensemble average on the right hand side can be evaluated by using the steady probability distribution $P_i(\phi_i)$ for ϕ_i , which can be obtained from the Fokker-Planck equation for Eq. (3): i.e., $\langle A(\phi_i)\rangle = \int_0^{2\pi} A(\phi)P_i(\phi)d\phi$, where A represents a function of ϕ_i . The distribution P_i can be obtained as $P_i(\phi_i) = 1/2\pi + O(\sigma_i, D/\omega)$, where $\sigma_i = \max_{0 \leq \phi < 2\pi} |\delta\omega_i(\phi)/\omega|$. Since $\delta\mathbf{F}_i$ is small, σ_i is a small parameter. Therefore, P_i can be approximated by $P_i \simeq 1/2\pi$ for small D/ω and we have

$$\langle\delta\omega_i(\phi_i)\rangle \simeq \frac{1}{2\pi} \int_0^{2\pi} \delta\omega_i(\phi)d\phi \equiv \overline{\delta\omega}_i, \quad (5)$$

$$\langle Z(\phi_i)Z'(\phi_i)\rangle \simeq \frac{1}{2\pi} \int_0^{2\pi} Z(\phi)Z'(\phi)d\phi = 0, \quad (6)$$

where we used the fact $Z(0) = Z(2\pi)$. If we substitute Eqs. (5) and (6) into Eq. (4), we have

$$\frac{d}{dt}\langle\phi_1 - \phi_2\rangle = \overline{\delta\omega}_1 - \overline{\delta\omega}_2. \quad (7)$$

Since in general $\overline{\delta\omega}_1 - \overline{\delta\omega}_2 \neq 0$, this equation indicates that the average phase difference increases or decreases in proportion to the time t . In other words, the two oscillators still have different mean frequencies even when a common white Gaussian noise is applied, i.e., $d\langle\phi_1\rangle/dt \neq d\langle\phi_2\rangle/dt$. Intuitively, this result is natural because the white noise has a uniform power spectrum and does not have a characteristic frequency, which could entrain the oscillator frequencies.

Let θ and ψ be defined by $\theta = \phi_1 - \phi_2$ and $\psi = \phi_1 + \phi_2 - 2\omega t$. The variable θ measures the phase difference between the two oscillators. For small D and $\overline{\delta\omega}_i$, it is

expected that ϕ_i still has a mean frequency close to ω . Therefore, θ and ψ can be regarded as slow variables. If we change the independent variables from (t, ϕ_1, ϕ_2) to (t, θ, ψ) and perform the time-averaging with respect to t , we can obtain the Fokker-Planck equation corresponding to Eq. (2) as follows:

$$\begin{aligned} \frac{\partial Q}{\partial t} &= -(\overline{\delta\omega}_1 - \overline{\delta\omega}_2) \frac{\partial Q}{\partial \theta} - (\overline{\delta\omega}_1 + \overline{\delta\omega}_2) \frac{\partial Q}{\partial \psi} \\ &+ D \frac{\partial^2}{\partial \theta^2} [2\{\Gamma(0) - \Gamma(\theta)\}Q] \\ &+ D \frac{\partial^2}{\partial \psi^2} [2\{\Gamma(0) + \Gamma(\theta)\}Q], \end{aligned} \quad (8)$$

where $Q(t, \theta, \psi)$ is the joint probability distribution and Γ is defined by

$$\Gamma(\theta) = \frac{1}{2\pi} \int_0^{2\pi} Z(\phi)Z(\phi + \theta)d\phi. \quad (9)$$

Hereafter we assume the case of $\overline{\delta\omega}_1 > \overline{\delta\omega}_2$ without loss of generality.

It is in general possible that Z has a period smaller than 2π . Since Z is not a constant function, we suppose that $Z(\phi) = Z(\phi + 2\pi/n)$, where n is a positive integer. Let $h(\theta)$ be defined by $h(\theta) = 2\{\Gamma(0) - \Gamma(\theta)\}$. It can be shown that $h(\theta) \geq 0$ for any $\theta \in [0, 2\pi)$. The zero points s_m of h are given by $s_m = 2\pi m/n$, $m = 0, 1, \dots, n-1$, where $s_0 = 0$. Equation (8) has the steady solution $Q_s(\theta)$ such that it is a continuous function of θ only and satisfies the two conditions (i) $Q_s(\theta) = Q_s(\theta + 2\pi)$ and (ii) $\int_0^{2\pi} Q_s(\theta)d\theta = 1$. In each interval (s_m, s_{m+1}) , the solution Q_s can be obtained as follows:

$$Q_s(\theta) = \frac{\varepsilon}{2\pi h(\theta)} \int_{\theta}^{s_{m+1}} \exp\left[-\varepsilon \int_{\theta}^x \frac{1}{h(y)} dy\right] dx, \quad (10)$$

where $\varepsilon = (\overline{\delta\omega}_1 - \overline{\delta\omega}_2)/D > 0$. The right hand side of Eq. (10) has singularities at the zero points of h . The value of Q_s for each s_m is given by $Q_s(s_m) = \lim_{\theta \rightarrow s_m} Q_s(\theta)$. Assume that $\theta \in (s_m, s_{m+1})$, i.e., θ is an arbitrary regular point. It can be shown that $\lim_{\varepsilon \rightarrow 0} Q_s(\theta) = 0$ holds due to the factor ε in the numerator. This implies that the probability has to concentrate at the singular points s_m , $m = 0, 1, \dots, n-1$ because Q_s satisfies the condition (ii). Thus, Q_s in the limit $\varepsilon \rightarrow 0$ is given by

$$Q_s(\theta) = \frac{1}{n} \sum_{m=0}^{n-1} \delta(\theta - s_m), \quad (11)$$

where δ is Dirac's delta function. For small positive ε , the distribution Q_s has narrow and sharp peaks at $\theta = s_m$, $m = 0, 1, \dots, n-1$ while Q_s is close to zero in the regions other than the neighborhoods of these singular points. The peaks of Q_s become narrower as ε approaches zero. Equation (11) indicates that multiple peaks exist if Z has a period smaller than 2π , i.e., $n > 1$. The existence of multiple peaks has been pointed out in the case of identical oscillators [6]

The above profile of Q_s clearly shows that the phase locking states, where $\theta \bmod 2\pi \simeq s_m$, are achieved for a large fraction of time during the time evolution when the noise intensity D is relatively large with respect to the mean frequency difference $\overline{\delta\omega_1} - \overline{\delta\omega_2}$: i.e., the non-resonant entrainment occurs. Let δ be a small positive constant and U_δ be the δ -neighborhood defined by $U_\delta = \cup_{m=0}^{n-1} (s_m - \delta, s_m + \delta)$, where $\bmod 2\pi$ is taken for $s_0 - \delta$. We identify the phase locking state by the condition $\theta \in U_\delta$. As shown by Eq. (7), the present entrainment is not characterized by coincidence of the mean frequencies of the two oscillators. Therefore, as a measure for the entrainment, we introduce the phase locking time ratio μ defined by

$$\mu = \lim_{T \rightarrow \infty} \frac{T_L}{T}, \quad (12)$$

where T_L represents the total time length for which $\theta \in U_\delta$ happens during the period T . This ratio can also be expressed in terms of Q_s by $\mu = \int_{U_\delta} Q_s(\theta) d\theta$, where the integral is taken over the set U_δ . Equation (11) shows that $\mu \rightarrow 1$ in the limit $\varepsilon = (\overline{\delta\omega_1} - \overline{\delta\omega_2})/D \rightarrow 0$.

A phase locking state cannot continue for the infinite time but phase slips have to happen during the periods such that $\theta \notin U_\delta$ because the two mean frequencies $d\langle\phi_1\rangle/dt$ and $d\langle\phi_2\rangle/dt$ are different. Equation (7) indicates that the mean frequency difference is given by the constant $\overline{\delta\omega_1} - \overline{\delta\omega_2}$. This implies that the average number of phase slips, which happen in a unit time interval, does not become small but remains constant even for relatively large D compared with $\overline{\delta\omega_1} - \overline{\delta\omega_2}$. In other words, the average interslip interval remains constant. On the other hand, the probability for $\theta \notin U_\delta$ decreases and converges to zero as D increases: i.e., the phases come to be locked for almost all the time. These two facts imply that a single phase slip completes more rapidly: i.e., the time needed for one phase slip decreases and converges to zero as D increases. We emphasize that the above mentioned behavior is a remarkable feature of the nonresonant entrainment. This behavior is very different from that of resonant entrainment by a periodic signal, where the average interslip interval diverges and the mean frequencies becomes identical as the signal intensity approaches the critical value for entrainment.

In order to demonstrate the above analytical results, we show numerical results for an example described by the Stratonovich stochastic differential equations

$$\dot{\phi}_i = \omega_i + \sin(\phi_i) \eta(t), \quad i = 1, 2, \quad (13)$$

where ω_i , $i = 1, 2$ are slightly different constants.

Figure 1(a) shows the mean frequency difference $\Delta\omega = d\langle\phi_1\rangle/dt - d\langle\phi_2\rangle/dt$ plotted as a function of D , where ω_1 is fixed to unity and five different values of ω_2 are employed. We calculated $\Delta\omega$ by replacing the ensemble averages in $\Delta\omega$ with the time averages, i.e., $d\langle\phi_i\rangle/dt = \lim_{T \rightarrow \infty} \{\phi_i(T) - \phi_i(0)\}/T$. The mean frequency difference $\Delta\omega$ is not zero except for the case $\omega_1 = \omega_2 = 1$.

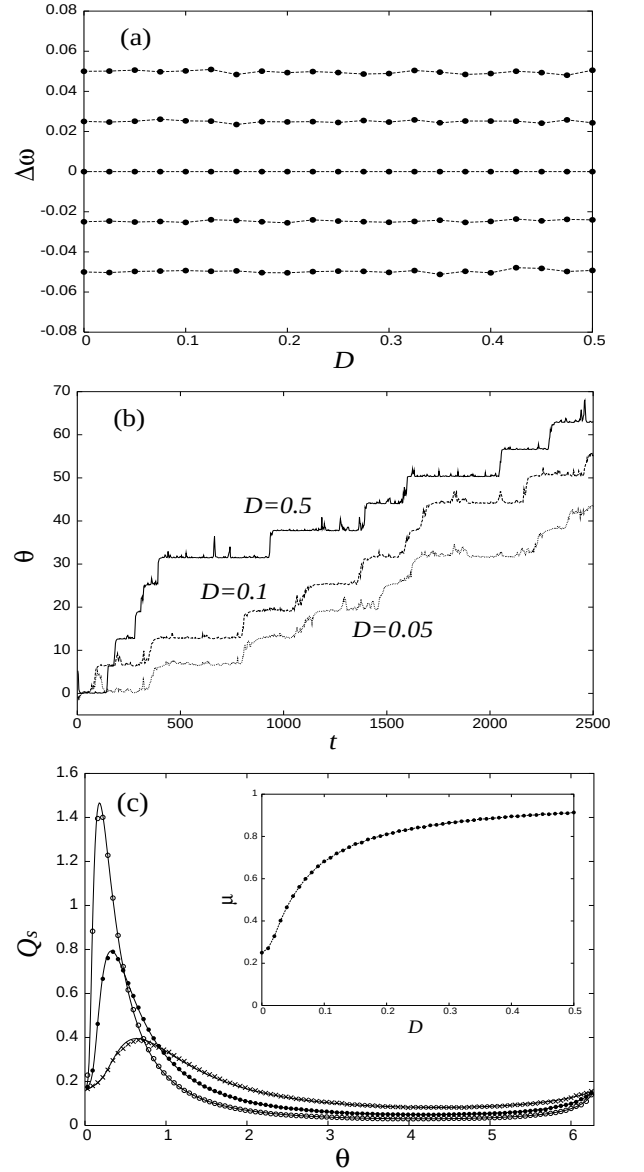


FIG. 1: Entrainment in phase models with $Z = \sin(\phi)$: (a) mean frequency difference $\Delta\omega$ vs. D , (b) time evolution of phase difference $\theta = \phi_1 - \phi_2$ and (c) probability distribution $Q_s(\theta)$ for $D = 0.02$ ($\times$), 0.05 ($\bullet$), and 0.1 ($\circ$), where analytical results are shown by solid line. The inset in (c) shows μ plotted against D . In (b) and (c), $\omega_1 = 1$ and $\omega_2 = 0.98$.

It is clearly shown that $\Delta\omega$ is constant and independent of D . This result coincides with the analytical result of Eq. (7). The steady distribution $P_i(\phi_i)$ is approximately given by $P_i(\phi_i) \simeq (1/2\pi)[1 + (D/2\omega_i)\sin(2\phi_i)]$ for this example. This shows that the assumption $P_i(\phi_i) \simeq 1/2\pi$ is reasonable for small D used in the numerical calculations. Thus, the result of Eq. (7) holds.

The time evolution of the phase difference $\theta = \phi_1 - \phi_2$ is shown for three different values of D in Fig. 1(b), where $\omega_1 = 1$ and $\omega_2 = 0.98$. These results clearly show that the phases are locked near $\theta \simeq 2\pi n$, $n \in \mathbb{Z}$ and the

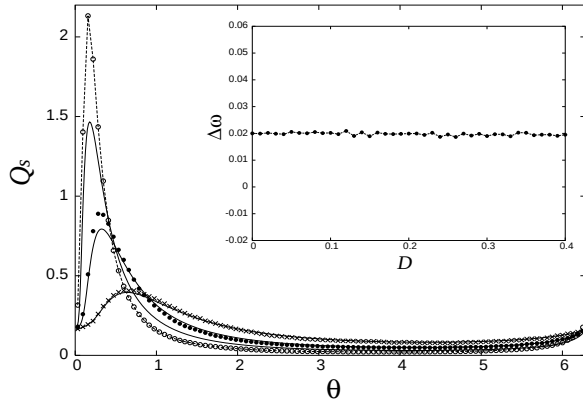


FIG. 2: Entrainment in SL oscillators. Probability distribution $Q_s(\theta)$ is shown for $D = 0.02$ ($\times$), 0.05 ($\bullet$), and 0.1 ($\circ$), where analytical results are shown by solid line. The inset shows $\Delta\omega$ vs. D . Parameters are $\delta\omega_1 = 0$ and $\delta\omega_2 = -0.02$.

phase slips occur intermittently. It should be noted that the time needed for a single phase slip becomes smaller as D increases. This observation is in agreement with the analytical result.

The probability distribution $Q_s(\theta)$ is shown in Fig. 1(c) for three different values of D , where $\omega_1 = 1$ and $\omega_2 = 0.98$. The analytical results of Eq. (10) are also shown for the corresponding values of $\varepsilon = (\omega_1 - \omega_2)/D$. It is seen that Q_s is close to the uniform distribution for small D or large ε . In contrast, the distribution has a sharp peak near $\theta = 0$ for large D or small ε . The peak in Q_s becomes narrower and its position becomes closer to $\theta = 0$ as D increases. This agrees with the previous theory since the zero point of $h(\theta)$ is only $\theta = 0$ in this example and thus the theory tells that Q_s has a peak only at $\theta = 0$. It is also seen that the peak is not centered at $\theta = 0$ but shifted to the positive direction: i.e., the phase ϕ_1 of the larger natural frequency oscillator is kept advanced with respect to ϕ_2 even in the phase locking state. The inset of Fig. 1(c) shows that the phase locking time ratio μ monotonically increases and approaches unity with increasing D . Figure 1(c) clearly demonstrates that the phases are locked for a larger frac-

tion of the time as D increases.

In order to validate the theory based on the phase reduction method, we carried out numerical experiments for the Stuart-Landau (SL) oscillator

$$\dot{\psi}_j = (1 + ic_j)\psi_j - |\psi_j|^2\psi_j - \eta(t), \quad j = 1, 2, \quad (14)$$

where $\psi_j \in \mathbb{C}$ and $c_j = 1 + \delta\omega_j$ is a real constant. This is reduced to the phase model $\dot{\phi}_j = 1 + \delta\omega_j + \sin(\phi_j)\eta(t)$, where ϕ_j is the appropriately defined phase variable.

In Fig. 2, the numerically obtained distribution $Q_s(\theta)$ is shown for three different values of D , where $\delta\omega_1 = 0$ and $\delta\omega_2 = -0.02$. The analytical results obtained from the corresponding phase model are also shown for the corresponding values of $\varepsilon = (\delta\omega_1 - \delta\omega_2)/D$. A sharp peak of Q_s appears near $\theta = 0$. It becomes narrower and approaches $\theta = 0$ as D increases. Agreement between the numerical and analytical results is excellent, especially in small D region, where the phase reduction method gives a good approximation. The inset shows the mean frequency difference $\Delta\omega = d\langle\phi_1\rangle/dt - d\langle\phi_2\rangle/dt$ plotted as a function of D for the same $\delta\omega_1$ and $\delta\omega_2$. It is clearly shown that $\Delta\omega$ does not depend on D and its constant value is given by $\Delta\omega = \delta\omega_1 - \delta\omega_2$. This behavior also agrees with the theory. The agreements in the behaviors of Q_s and $\Delta\omega$ validate the theory based on the phase model.

In conclusion, we have found the nonresonant entrainment between two nonidentical limit cycle oscillators subjected to a common external white Gaussian noise. We theoretically elucidated this phenomenon by using a phase model and presented numerical evidence for a particular phase model and the SL oscillator. The nonresonant entrainment is anomalous in the sense that the two oscillators have different mean frequencies, where the difference is independent of the noise intensity and the average interslip interval is constant, while their phases come to be locked for almost all the time for relatively large noise. It is expected that a similar entrainment occurs for various noise-like signals having broad continuous power spectra.

The authors would like to thank R. Roy, D. Tanaka, H. Nakao, and T. Aoyagi for helpful discussions.

[1] Y. Kuramoto, *Chemical Oscillation, Waves, and Turbulence* (Springer-Verlag, Tokyo, 1984).
 [2] Z. F. Mainen and T. J. Sejnowski, *Science* **268**, 1503 (1995).
 [3] T. Royama, *Analytical Population Dynamics* (Chapman and Hall, London, 1992); B. T. Grenfell *et al.*, *Nature*(London) **394**, 674 (1998).
 [4] T. Yamamoto, I. Oowada, H. Yip, A. Uchida, S. Yoshi-

mori, K. Yoshimura, J. Muramatsu, Shin-itiro Goto, and P. Davis, *Optics Express* **15**, 3974 (2007).
 [5] J. Teramae and D. Tanaka, *Phys. Rev. Lett.* **93**, 204103 (2004); J. Teramae and D. Tanaka, *Prog. Theor. Suppl.* **161**, 360 (2006).
 [6] H. Nakao, K. Arai, and Y. Kawamura, *Phys. Rev. Lett.* **98**, 184101 (2007).